PVC - T CHECK VALVE WITH TRANSPARENT CAP

MATERIALS

Body and components: PVC U
Flap seal: EPDM
O'ring gaskets: EPDM

STANDARDS

The jointing valves strictly respect the standards EN 1452-3.

ASSEMBLY

The valves should preferably be assembled vertically and keeping in mind the flow direction.
Do not install the valve directly to a pump, respecting a minimum distance of 5 x D.

SERVICE PRESSURE

The service pressure, just as an indication, is of 10 bar at 20ºC (water).

ABREVIATION INTERPRETATION

d - Nominal diametre
Quant - Quantity of fittings that each box contains
Gr - Approximate weight of fittings in grams
C - Box 39 x 29 x 31

Válvula retenção com visor


T Check valve with transparent cap

Clapet anti-retour avec viseur

Válvula anti-retorno con visor



01 61 1411 000

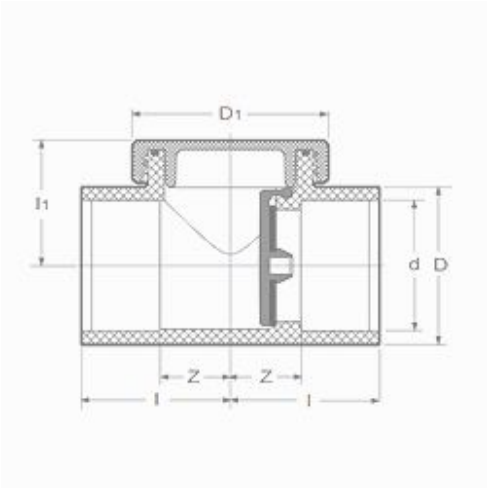

d	D	D1	l	Z	I1	PN	Gr	Quant	Nº Código
50	61	84	57	25.5	53.5	10	290	C 40	01 61 1411 050
63	76	95	72	34	61	10	450	C 24	01 61 1411 063