PVC-U MINI VALVE

STANDARDS

The mini valves strictly respect the standards EN10226-1and ISO 7/1.

ASSEMBLY

By screwing according to ISO 7/1 recommendations.

SERVICE PRESSURE

The service pressure, just as an indication, is of 10 bar at 20ºC (water)

ABREVIATION INTERPRETATION

d - Nominal diametre
G - Nominal diametre of the screw
Quant - Quantity of fittings that each box contains
Gr - Approximate weight of fittings in grams
A - Box 13.5 x 13.5 x 12
B - Box 29 x 23 x 16.5

Mini válvula


Mini valve

Mini-vanne

Mini-Valvula



01 61 1417 000

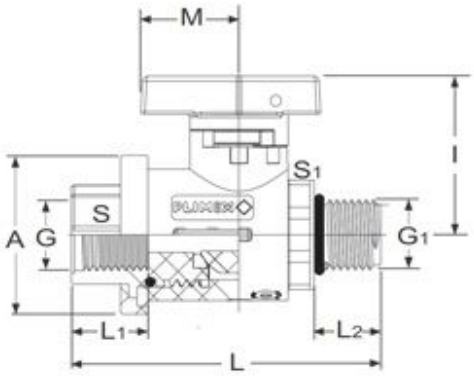

G	G1	DN	L	L1	L2	A	M	I	S	S1	Gr	Quant	Nº Código
" 1/4	" 1/4	6	59	14	12	29	18	29	17	20	42	B 80	01 61 1417 014
" 1/4	" 3/8	6	59	14	12	29	18	29	17	20	42	B 80	01 61 1417 038

Casquilho duplo


Nipple

Mamelon double

Machón doble rosca



01 61 1011 000

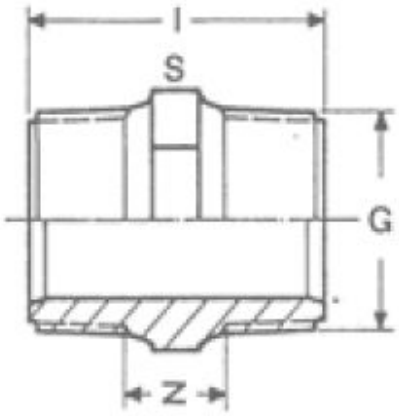

G	Z	l	S	Gr	Quant	Nº Código
" 1/4	4	28	17	3.6	A 200	01 61 1009 014

Plug

G	l	S	Gr	Quant	Nº Código
" 1/4	16	17	2.5	A 200	01 61 1011 014

Adaptador cónico para tubo


Conic hose nozzle

Douille conique

Espiga conexion cónica/roscada



01 61 1013 000

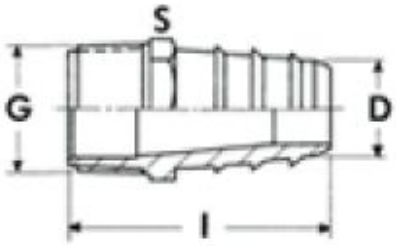

G	l	D	S	Gr	Quant	Nº Código
" 1/4	43	8	17	4	A 150	01 61 1013 014

Conic hose nozzle F/

G	l	D	S	Gr	Quant	Nº Código
" 1/4	43	8	17	4	A 150	01 01 1427 014